

1 **The Influence of Bike Lane Buffer Types on Perceived Comfort and Safety of Bicyclists and**
2 **Potential Bicyclists**

3
4 Paper # 15-3701

5
6 Nathan McNeil (corresponding author)
7 Center for Transportation Studies
8 Nohad A. Toulan School of Urban Studies and Planning
9 Portland State University
10 PO Box 751
11 Portland, OR 97201
12 503-725-8581 (phone)
13 503-725-8770 (fax)
14 nmcneil@pdx.edu

15
16 Christopher M. Monsere
17 Department of Civil & Environmental Engineering
18 Portland State University
19 PO Box 751
20 Portland, OR 97201
21 503-725-9746 (phone); 503-725-5950 (fax)
22 monsere@pdx.edu

23
24 Jennifer Dill
25 Nohad A. Toulan School of Urban Studies and Planning
26 Portland State University
27 PO Box 751
28 Portland, OR 97201
29 503-725-5173 (phone)
30 503-725-8770 (fax)
31 jdill@pdx.edu

32
33
34
35 Revised: November 15, 2014

36
37 Number of Words: 4,939
38 Number of Figures and Tables: 10 x 250 = 2,500
39 Total Number of Words: 7,439

40

1 **ABSTRACT**

2 Buffered and protected bike lanes are increasingly recognized as a valuable tool in enticing
3 potential or wary cyclists to use a bicycle for transportation. These facilities— which provide extra space
4 and (in the case of protected bike lanes) physical separation from motor vehicles—have been studied and
5 are preferred by many bicyclists over traditional bike lanes. There has been little research, however, on
6 the difference between buffer types and how they impact people’s sense of the safety and comfort of
7 bicycling. This paper uses data from surveys collected for a multi-city study of newly constructed
8 protected bike lanes to examine the influence of various hypothetical and actual buffered bike lane
9 designs (some with and some without physical protection) from the perspective of current bicyclists
10 (n=1,111) and residents living near the new facilities (n=2,283) who could be potential bicyclists.
11 Findings suggest striped or painted buffers offer some level of increased comfort, while buffers with some
12 sort of physical protection, even as minimal as a plastic flexpost, yield significant increases in perceived
13 comfort for potential cyclists with safety concerns (the *Interested but Concerned* demographic). Among
14 residents living near recently built protected bike lanes, 71% of all residents and 88% of the *Interested but*
15 *Concerned* indicated that they would be more likely to ride a bicycle if motor vehicles and bicycles were
16 physically separated by a barrier.
17

1 INTRODUCTION

2 At a basic level, most people will not consider riding a bicycle if they don't believe they have a safe and
 3 comfortable place to do so (1, 2). Early efforts to dedicate space for bicyclists on roadways resulted in the
 4 addition of striped bike lanes which provide a dedicated space for bicycles adjacent to motor vehicle
 5 traffic. While research has shown that bicyclists will choose streets with bike lanes over those without (3-
 6 5), there is a growing recognition in the United States that a standard bike lane is sometimes inadequate as
 7 a means of establishing a place that many segments of the general population would be willing to ride. In
 8 contrast, it is clear that off-street trails or paths offer a comfortable place for most people to bicycle (1, 3).
 9 Increasingly, designs are seeking to provide additional separation from motor vehicles by providing a
 10 "buffer" between a bike lane and other traffic lanes. These buffered bike lanes offer extra separation from
 11 other traffic and can provide the space to add physical barriers such as bollards, curbs or planters. While
 12 there is growing consensus that the addition of such buffers can increase bicyclists' sense of safety, and
 13 the number of on-street bike lanes protected from moving traffic by a buffer has increased considerably
 14 (6), there has been little research seeking to differentiate between the effects of various types of buffers
 15 and their influence on bicyclist comfort or perception of safety.

16 A bike lane buffer may be simply paint, in what the National Association of City Transportation
 17 Officials (NACTO) terms a "buffered bike lane" in its 2012 Urban Bikeway Design Guide, or it may exist
 18 with some form of vertical physical protection in the case of a "cycle track" or protected bike lane (7).
 19 There is little published research about the desired type or width of buffers to adequately provide a safe
 20 and comfortable riding experience. However, the NACTO design guide suggests a minimum width of 18
 21 inches based on the impracticality of striping a narrower width, and requires diagonal cross-hatching for
 22 three foot or greater buffers. In the design of a cycle track, a minimum of a three-foot buffer is suggested
 23 "in the absence of a raised median or curb," with the space used to locate bollards or other physical
 24 protection (7). The guide also suggests a three foot buffer between parked cars and the bike lane in the
 25 case of a parking protected bike lane. A buffer may also exist between a parking strip and a bike lane,
 26 which has been shown to encourage bicyclists to ride outside of the "door zone" (8).

27 A random phone survey of residents of the Portland metro area, a relatively bike-friendly area,
 28 found that only 13% of respondents felt very comfortable bicycling either on streets without bike lanes, or
 29 on a busy street with a bike lane. Most of the remaining respondents (56%) were interested in bicycling,
 30 but were not very comfortable in those conditions (3). When asked, most people prefer separated facilities
 31 over a striped bike lane or sharing lanes with motor vehicles (3, 9-13), and recent research goes further to
 32 indicate that perceived risk is lower on separated facilities (13-15). Some research reveals that facility
 33 preference may vary among different groups of bicyclists (and non-bicyclists). Sanders (13) asked survey
 34 respondents to rate their level of comfort on a number of facilities, including a barrier-separated bike lane
 35 with and without parking between the bike lane and the moving traffic lane – interestingly, non-cyclists
 36 indicated a greater level of comfort without the parking lane, while weekly or daily cyclists preferred the
 37 facilities equally. Some studies have found that more experienced cyclists prefer striped lanes over
 38 separate multiuse paths (4, 16-18). These differences may be due to factors other than comfort, as paths
 39 often require greater deviations from the shortest route or involve mixing with pedestrians (which can
 40 slow travel). On the other hand, research has found that women and less-experienced cyclists generally
 41 prefer more separated facilities and avoiding high traffic volumes and speeds (12, 19-21).

42 This paper contributes to the literature by quantifying the influence of buffer type on self-reported
 43 comfort levels. To do this, we use data from surveys collected for a multi-city study of newly constructed
 44 protected bike lanes (22) to examine the influence of various hypothetical and actual buffered bike lane
 45 designs (some with and some without physical protection) from the perspective of current bicyclists and
 46 residents who could be potential bicyclists. Not all possible types of buffers (23) are covered and other
 47 issues related to barrier types such as maintenance, snow removal, curb access, and durability are not
 48 explored in the paper. In the section that follows, the methodology to collect and administer the surveys is
 49 described. In the findings section, the analysis of hypothetical buffers comfort is followed by self-reported
 50 comfort. Finally, conclusions are presented.

1 **METHODOLOGY**

2 In the context of this paper, a buffer is considered to be any extra space between a bike lane and a
3 standard traffic lane in an on-street facility. Buffers may simply be delineated by pavement markings
4 (parallel white lines, often with hash marks indicating that the buffer is not a travel space), or may have
5 some aspect of vertical protection or separation (such as a bollard, flexible plastic post (also called a
6 flexpost or safe-hit post), planter box, raised curb, fence, etc.). Buffers may be quite narrow (as little as
7 one to one and a half feet) or wide. They may be characterized as a space where other forms of activity
8 are excluded, as is the case with planters or other treatments that restrict activity by occupying space.
9 Alternatively, other activity may be permitted or designated for a buffer space, such as a parking strip and
10 door zone placed between a bike lane and a standard travel lane (both the parking area and door zone
11 would be considered components of the buffer in this case).

12 Data used in this paper are from bicyclists intercepted in recently constructed protected bike lanes
13 (“intercept survey”) and residents living nearby the new protected bike lanes (“resident survey”). The
14 resident survey (n=2,283, 23% of those sent the survey in the mail) provided the perspective of people
15 who live, drive, and walk near the new lanes, as well as residents who bike on the new lanes. The
16 intercept survey (n= 1,111, 33% of those invited to participate who completed the online survey) focused
17 more on people’s experiences riding in the protected lanes. The study facilities included bike lanes with
18 protected buffers separating them from moving traffic lanes in five cities around the United States, as
19 shown in Table 1. The surveys were piloted and refined using a Portland State University (PSU) survey
20 methods class for the resident survey and PSU transportation students for the bicyclist intercept survey.
21 The study was reviewed and approved by PSU’s Human Subjects Research Review Committee. The
22 project report provides greater detail on the facilities, methodology, respondent demographics, and survey
23 results (22).

24 In discussing findings in this paper, respondents of the intercept survey may be referred to as
25 “bicyclists” and respondents of the resident mail-out survey may be referred to as “residents”. These
26 categories are not mutually exclusive though, as “bicyclists” could live in the vicinity of the facility, and
27 “residents” could also ride bicycle. However, very few people took both surveys: the resident survey,
28 which launched after the intercept survey, asked respondents if they have taken “a separate online
29 bicyclist survey about these protected bike lanes from us recently”; only 15 respondents, or 0.7%, said
30 they had.

1 **TABLE 1 Facility Characteristics**

Facility	Austin			Chicago		Portland	San Francisco	Washington DC
	Barton Springs Road	Rio Grande Street	Bluebonnet Lane	Dearborn Street	Milwaukee Avenue	Multnomah Street	Oak Fell Couplet	L Street
Typical Bike Lane Width (ft.)	6	12 (6' + 6')	10 (5' + 5')	9 (5' + 4')	7	7	7.25	8
One or two way	One-way	Two-way	Two-way	Two-way	One-way pair	One-way pair	One-way	One-way
Buffer Width (ft.)	1.5	4	4	3	2-4	3-7	5	3
Buffer Type	Flexposts	Flexposts	Flexposts	Flexposts; Parking	Parking; Flexposts; Paint	Planters; Flexposts; Parking	Flexposts	Flexposts
Facility Length (miles)	0.5	0.4	0.7	1.2	0.8	0.8	0.3	1.12
ADT	23-28k	5k	3.5k	8-18k	11k	10k	10-20k	10k
Approx. Peak Hour Bike Count	15	70	15	167	425	35	195	115
Surveys Conducted	Intercept, Resident	Intercept*	Resident**	Intercept, Resident	Intercept, Resident	Intercept, Resident	Intercept, Resident	Intercept, Resident

2 *A resident mail-out survey was not conducted for Rio Grande because the nearby population, dominated by student
3 housing at the University of Texas, had already entered summer break at the time of data collection.

4 **An intercept survey on Bluebonnet Lane resulted in only two completed responses after only about nine postcards
5 were distributed. This reflected the low use of the facility during the survey period (during the summer, outside of
6 the school year).

7 *Resident Survey*

8 Paper copies of the resident survey were mailed to up to 2,000 resident addresses within a specific
9 boundary (up to a quarter mile) of each study facility. The size of the boundary around each facility
10 differed based on the density of the surrounding area and the resulting distance needed to achieve an
11 ample sample size. Resident addresses are taken from the Reference USA database accessed through a
12 PSU subscription service. The paper surveys were printed in booklet form and ranged in size from 8-12
13 pages. Respondents could be entered into a drawing for one of three \$100 Amazon.com gift cards. Survey
14 recipients were given two options for completing the survey. They could fill out the paper copy of the
15 survey and return it in the postage-paid envelope or complete an online version of the questionnaire. Just
16 over a third of respondents (34%) opted to complete the survey online. The survey asked residents some
17 general questions about their travel behavior, attitudes about bicycling, and potential comfort bicycling
18 different types of facilities. More detailed questions followed about the recently constructed nearby
19 protected bike lane, including questions about how the facility impacted their neighborhood, and about
20 driving, walking and bicycling on the street.

21 Comparing the overall sample across the cities to Census data, resident survey respondents were
22 older, more likely to be homeowners, and more likely to have at least a four-year college degree. The
23 survey sample contained a slightly higher percentage of respondents identifying as white than comparison
24 tracts (81% compared to 76%), and slightly fewer identifying as black, Hispanic/Latino, or Asian (5-6%
25 compared 8-9%). Respondents were also more likely to have children in the household and work from
26 home. Although the combined group of respondents was only slightly more likely to be earning \$100,000
27 or more, this group was in fact overrepresented in most individual localities. Just over a third of resident
28 respondents (36%) had ridden a bicycle on the new facility since it was built (ranging from a low of 28%
29 for Barton Springs to a high of 46% for Oak and Fell Streets). To take into account respondents' current

1 riding behavior and views toward bicycling, residents were broken them down into bicyclist types using
 2 an established methodology for grouping people into a “cyclist typology” (3, 24). A breakdown of
 3 residents found that the respondents consisted of 5% *Strong and Fearless*, 27% *Enthusied and Confident*,
 4 42% *Interested but Concerned*, and 25% *No Way No How*. One application of the typology is to
 5 understand factors that influence the riding decisions of people who might ride a bicycle for
 6 transportation, but have concerns that could hold them back – these people would be categorized into the
 7 *Interested but Concerned* group. Of the 64% of respondents who had not ridden on the facility, 37% fell
 8 into the *Interested but Concerned* group; of those who had ridden on the facility, 51% fell into that
 9 category.

10 *Intercept Survey*

11 The intercept survey was designed to catch people riding in the protected bike lanes. Project team
 12 members, volunteers or city staff intercepted bicyclists along the study facility and handed them a
 13 postcard encouraging them to take an online survey. The postcard included a web address and unique
 14 code needed to access the survey. Locations for survey distribution along each facility were typically at
 15 places where bicyclists were already required to stop (i.e., stop-controlled or signalized intersections) so
 16 that the postcard distributors would not distract the bicyclists and potentially endanger their safety. To
 17 reduce the likelihood that an individual received more than one survey postcard, each time period was
 18 generally only surveyed once. Similar to the resident survey, respondents to the intercept survey were
 19 provided the option to enter a drawing for one of three \$100 Amazon.com gift cards.

20 Compared to the resident survey, the intercept survey went into greater depth on bicycle-specific
 21 questions relating to comfort on generic facilities and experiences on the recently constructed protected
 22 bike lane, and omitted most questions about the impact on the neighborhood, driving, and walking. A
 23 breakdown of bicyclists according by the bicyclist typology found that the respondents consisted of 8%
 24 *Strong and Fearless* bicyclists, 39% *Enthusied and Confident*, and 53% *Interested but Concerned*.
 25 Because cyclists were intercepted, no one was typed to *No Way No How*.

26 *Buffer-Related Survey Questions*

27 Both surveys asked respondents questions about the specific protected bike lane being studied, as well as
 28 questions about generic bike lanes with different types of buffer. Residents and intercepted bicyclists
 29 were asked a series of questions relating to how comfortable and safe they thought the protected bike
 30 lanes are. Both groups were also asked to rate how comfortable they would be riding a bicycle on a series
 31 of hypothetical scenarios, including on a bike path, on a street with no bike lane, a street with a bike lane,
 32 and a street with a protected bike lane (see 22). Bicyclists were also asked to rate how comfortable they
 33 would feel on a set of generic routes with varying types of buffers, using diagrams of each proposed
 34 buffer type (Figure 2). The rating scale presented went from 1 (very uncomfortable) to 6 (very
 35 comfortable). Intercepted bicyclists and select residents (those who indicated that they had bicycled on
 36 the new protected bike lane) were asked to indicate their comfort on the actual facility using the same
 37 scale. On certain facilities with different buffer sections, intercepted bicyclists were asked to about their
 38 comfort on the distinct sections.

39

Whether or not you currently ride a bicycle, please consider how comfortable you **would** be riding a bicycle in each place:

	Very Uncomfortable (1)	(2)	(3)	(4)	(5)	Very Comfortable (6)
 <p>(A) On a path or trail separate from the street</p>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
 <p>(B) On a commercial street with two lanes of traffic in each direction, with traffic speeds of 35 miles per hour, on-street car parking, and no bike lane</p>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
 <p>(C) On a similar street to (B), but with a striped bike lane added</p>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
 <p>(D) On a similar street to (B), but with a physically separated bike lane</p>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

Images created Nick Falbo, Alta Planning + Design

1
2
3

FIGURE 1 Resident and Intercept Survey Generic Facility Comfort Questions

How comfortable would you feel bicycling on a commercial street with two lanes of traffic in each direction, with traffic speeds of 35 miles per hour (Situation D above), but with the following types of separation from traffic:	
With a solid painted buffer	
With a painted 2-3 foot buffer	
With a painted buffer and parked cars	
With a raised concrete curb	
With a 2-3 foot buffer and plastic flexposts	
With planters separating the bikeway	

Images created Nick Falbo, Alta Planning + Design

1 FIGURE 2 Intercept Survey Hypothetical Buffer Comfort Questions

1 FINDINGS

2 **Hypothetical Facilities**

3 Both intercept and resident survey respondents provided stated comfort level information for the four
4 generic facilities shown in Figure 1. Responses to these questions provide some baseline information on
5 the survey respondents' comfort levels absent a buffer separating them from standard traffic lanes (or
6 with a single buffer and flexpost post separated lane). Mean responses on a scale of 1 (very
7 uncomfortable) to 6 (very comfortable), broken down by each facility surveyed, are shown in Table 2.
8 Each facility surveyed is shown in a column and the scores are rounded to one decimal.

9 In general, nearly all respondents stated they would be very comfortable (6 on the 1-6 scale)
10 riding on a path or trail separate from the street (Situation A) and uncomfortable (1 or 2 on the scale)
11 riding on a commercial street with two lanes of traffic in each direction, with traffic speeds of 35 miles
12 per hour, on-street car parking, and no bike lane (Situation B). While there is minimal difference between
13 the residents and intercepted bicyclists (or between cities/facilities) in comfort levels on a separate path or
14 trail, comfort levels on on-street facilities are consistently lower among residents than intercepted
15 bicyclists. This is undoubtedly because the resident sample includes people who bicycle rarely or not at
16 all, people who our data suggests do not feel comfortable and safe bicycling in most environments.

17 Most respondents would not be comfortable bicycling on commercial streets without a bike lane,
18 though there are a few minor differences between surveyed facilities: Tukey post-hoc tests revealed that
19 intercepted bicyclists in Washington, DC are statistically significantly more comfortable on streets
20 without bike lanes than intercepted bicyclists in San Francisco (Oak, $p < .001$), Portland (Multnomah,
21 $p < .001$), and Chicago (Milwaukee, $p < .01$ and Dearborn, $p < .05$). Austin residents around Barton Springs
22 were statistically significantly less comfortable than Chicago residents near Milwaukee ($p < .05$) and San
23 Francisco residents near Oak ($p < .01$).


24 The addition of a bike lane to the commercial street (Situation C) brings the mean comfort level
25 up significantly for both bicyclists and residents. Again, Washington DC bicyclist respondents are more
26 comfortable than several other groups, including Chicago (Dearborn, $p < 0.01$), Portland ($p < .01$) and San
27 Francisco (Oak $p < .05$). Resident respondents in Portland and San Francisco were statistically
28 significantly more comfortable than those in Austin around Barton Springs and Chicago around Dearborn
29 (Tukey post-hoc tests, all $p < .001$). The addition of physical separation (Situation D) raises the mean
30 comfort level even higher, solidly into the comfortable half of the scale for both surveyed groups. San
31 Francisco residents were more comfortable than those in Chicago around Milwaukee ($p < .05$), while
32 Portland residents were more comfortable than those in Chicago ($p < .05$). The differences between the
33 cities in the residents' comfort levels may be due to different levels of bicycling among the residents in
34 those cities, the typical facilities available in those cities, or other demographic or cultural differences.

35 FIGURE 3 provides a visual representation of the differences between the persons surveyed in
36 each city, including demonstrating that intercepted bicyclists in Washington, DC are more comfortable
37 than other bicyclists on streets with and without bike lanes.

1 **TABLE 2 Mean Stated Comfort on Hypothetical Facilities**

Hypothetical Facility		Austin*		Chicago		Portland	SF	D.C.	All
		Barton Springs	Rio Grande	Dear.	Milw.	Mult.	Oak / Fell Streets	L Street	
A) Path or Trail	Bicyclists	5.6	5.6	5.8	5.7	5.7	5.7	5.7	5.7
	Residents	5.6	-	5.5	5.5	5.5	5.6	5.5	5.6
B) Commercial Street	Bicyclists	2.5	2.5	2.5	2.5	1.9	2.1	2.9	2.4 ^a
	Residents	1.7	-	1.8	1.9	1.8	1.9	1.8	1.8 ^b
C) Commercial Street with Bike Lane	Bicyclists	4.2	4.1	4.1	4.3	4.0	4.2	4.5	4.2 ^a
	Residents	3.3	-	3.2	3.5	3.7	3.7	3.4	3.5 ^a
D) Commercial Street with Physical Separation	Bicyclists	5.3	5.5	5.4	5.3	5.2	5.5	5.5	5.4
	Residents	4.6	-	4.4	4.4	4.8	4.7	4.5	4.6 ^a
n	Bicyclists	17	42	117	208	108	247	280	1019
	Residents	519	n/a	191	304	468	508	229	2219

2 a. There was a statistically significant difference between facilities as determined by one-way ANOVA ($p < .001$)3 b. There was a statistically significant difference between facilities as determined by one-way ANOVA ($p < .05$)4 *The resident responses under Barton Springs on the hypothetical facilities include resident who responded to the
5 Bluebonnet survey (the survey mail-out area for Bluebonnet was immediately adjacent to the area for Barton
6 Springs, and included questions about the Barton Springs facility)7
8

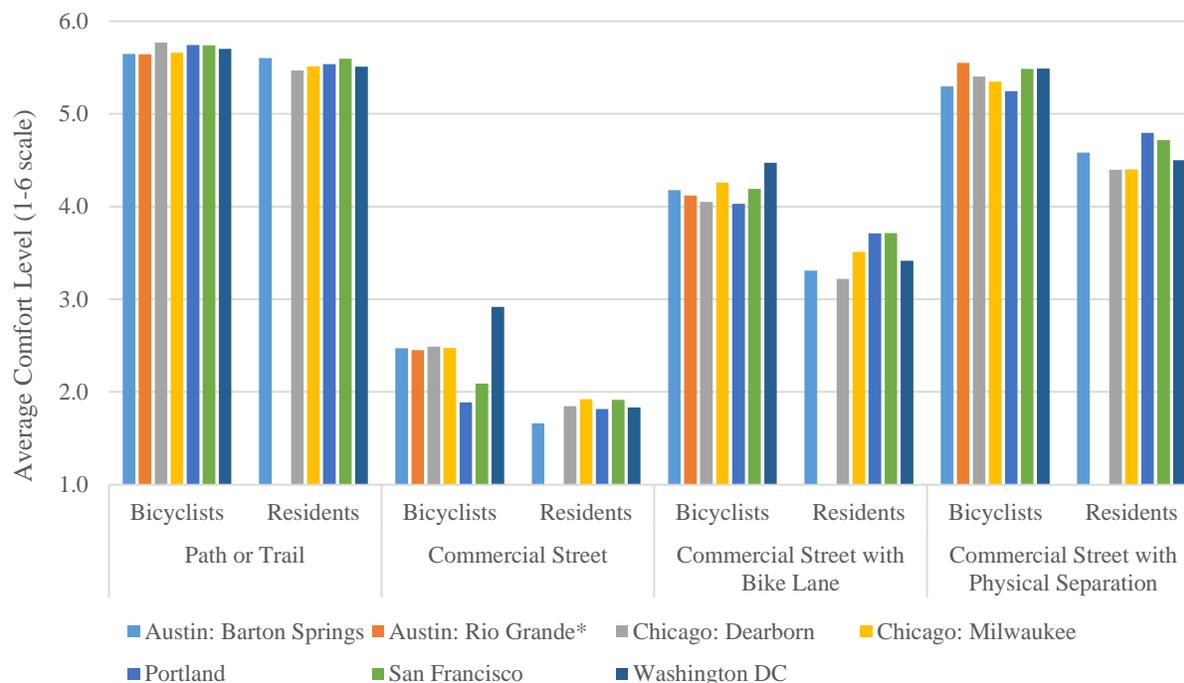

* Note: There was no resident survey on Rio Grande Street.

FIGURE 3 Mean Stated Comfort Level on Hypothetical Facilities

Intercepted bicyclists were then asked to use the same scale of 1 (very uncomfortable) to 6 (very comfortable) to indicate their level of comfort on a series of different buffer and separation types (as shown in Figure 2 above). The different buffer types and the mean stated comfort for each are shown in Table 3. The options, shown ranked from least to most comfortable according to mean comfort rating, were presented to survey respondents in an unordered manner; the order of presentation is shown in parenthesis next to each item description in the table. In the table, the types of buffer present on the actual facility on which bicyclists were intercepted have been shaded.

The respondents' comfort ratings of the differing hypothetical buffers are very consistent across the cities and facilities; in fact, the buffers with planters, flexposts, and a concrete curb ranked first, second and third most preferred, respectively, across each of the seven surveys, with the bottom three options showing considerable consistency as well. The buffer types without some type of vertical physical protection, namely the solid painted buffer and the painted 2-3 foot buffer, received the lowest mean comfort rating. Only the buffer consisting of paint and a lane for parked cars had significantly different comfort scores across the cities as revealed by a one-way ANOVA ($p < .001$). Post-hoc Tukey tests revealed respondents on Dearborn and Milwaukee were significantly more comfortable with a parked car buffer than those on Multnomah and Oak, while L Street respondents were also more comfortable than those on Oak. Local experience with a similar type of facility may have influenced respondents' perceptions in either a negative manner (as may have been the case in Portland and San Francisco), or in a positive manner (in Chicago and Washington, D.C.). Overall, the comfort rating for the buffer with parking may suggest that, in comparison to the highest rated buffers, parked (or parking vehicles) represent some level of added complication. It could be that parking cars and pedestrian activity from departing passengers influence the perception of comfort.

The most common buffer type used on the actual facilities on which bicyclists were intercepted, the two to three foot buffer with plastic flexposts, is rated very highly despite offering less actual physical protection (i.e. it would not do much to stop a vehicle from entering the bicycle lanes) than two of the

1 lesser rated facilities (the painted buffer with parked cars and the raised concrete curb). This may suggest
2 that familiarity with the buffer type was a positive experience.

3 **TABLE 3 Intercepted Bicyclists Mean Stated Comfort with Hypothetical Buffer Types**

Hypothetical Buffer Type	Austin		Chicago		Portland	SF	D.C.	All	"Interested but Concerned" only
	Barton Springs	Rio Grande	Dear.	Milw.	Mult.	Oak / Fell Streets	L Street		
Solid painted buffer (5)	4.5	4.8	4.6	4.6	4.6	4.7	4.6	4.7	4.2 ^b
Painted 2-3 foot buffer (3)	4.4	4.8	4.6	4.7	4.6	4.7	4.7	4.7	4.2 ^b
Painted buffer and parked cars (1)	4.4	4.5	5.0	5.1	4.4	4.4	4.8	4.7 ^a	4.5 ^b
Raised concrete curb (6)	4.8	5.3	5.3	5.1	5.0	5.2	5.2	5.2	5.1
2-3 foot buffer and plastic flexposts (2)	5.1	5.4	5.4	5.3	5.2	5.4	5.4	5.4	5.1 ^b
Planters separating the bikeway (4)	5.4	5.7	5.6	5.5	5.5	5.5	5.6	5.57	5.46 ^c
n	17	42	117	208	108	247	281	1020	541

4 *Shaded cells correspond to buffer type existing on facility where bicyclist was intercepted


5 a. Mean score is significantly different between facilities as determined by one-way ANOVA ($p < .001$)

6 b. Mean score is significantly different between cyclist types ($p < .001$). Post-hoc Tukey tests show the *Interested but Concerned* differed from the *Strong and Fearless* ($p < .001$) and *Enthusied and Confident* ($p < .001$)

7 c. Mean score is significantly different between cyclist types ($p < .05$). Post-hoc Tukey tests show the *Interested but Concerned* differed from the *Enthusied and Confident* ($p < .05$), though not from the *Strong and Fearless*.
8 Note that results have been rounded to nearest hundredth here to demonstrate the difference.

9
10
11
12 As shown in the final column of Table 3, bicyclists in the *Interested but Concerned* category were less
13 comfortable than other cyclist groups in most of the buffer types (the exceptions being the raised concrete
14 curb, where there was no difference, and the planter buffer, where they were only slightly less
15 comfortable than the *Enthusied and Confident*). However, as Figure 4 demonstrates, bicyclists in the
16 *Interested but Concerned* category did achieve much greater increases in comfort with the buffers over a
17 standard bike lane. The figure shows the change in the overall mean comfort scores for the different
18 bicyclist types in the intercept sample (*Strong and Fearless*, *Enthusied and Confident*, and *Interested but*
19 *Concerned*), compared to a commercial street with a standard striped bike lane (Situation C in Figure 1
20 and Table 2). For each buffer type, a normalized score of 0% indicates that the mean comfort level was
21 the same as in a standard bike lane, while a score of 100% would indicate that the respondents were, on
22 average, twice as comfortable (e.g. an increase of 3 to 6 on our 6 point scale). Those cyclists already
23 falling into the two most comfortable categories realize little change in comfort with several buffer types,
24 and are even slightly less comfortable with a buffer with parked cars. However, the *Interested but*
25 *Concerned* group shows an increase in stated comfort of 24% to 31% for the painted buffers and buffer
26 with parking, and increase to around 50% more comfortable for the buffers with a concrete curb, plastic
27 flexposts, or planters.

1

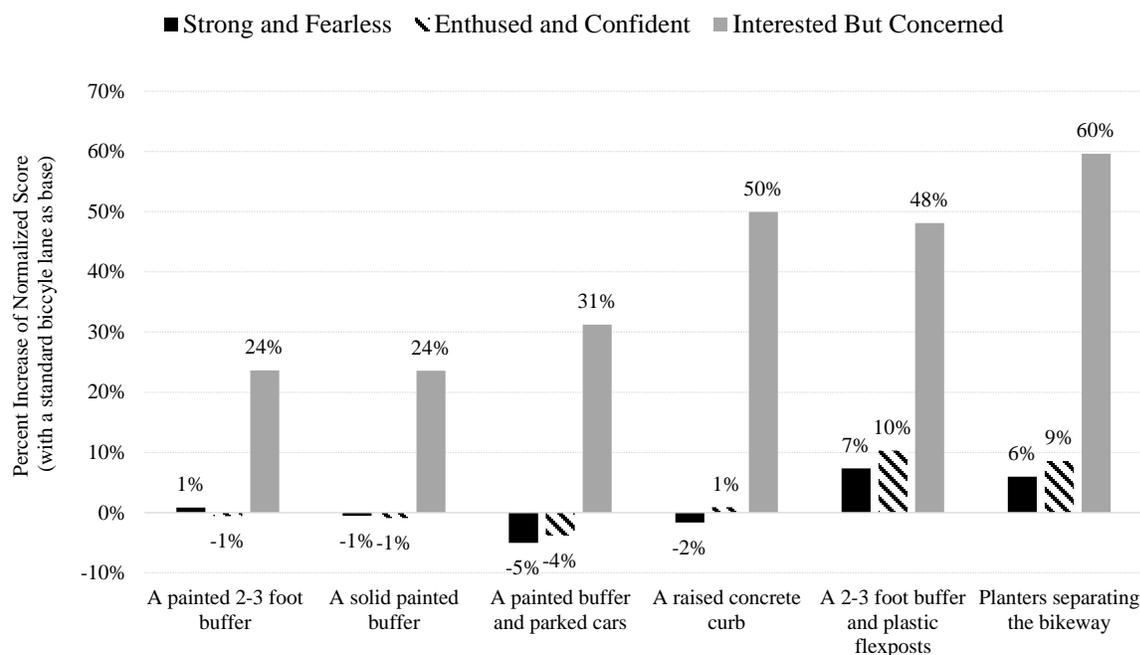

2

3 **FIGURE 4 Intercepted Bicyclists: Difference in Mean Comfort Score with Hypothetical**
 4 **Buffers from Mean Comfort in a Bike Lane, By Bicyclist Type**

5

6 Experience on the New Protected Lanes

7 Intercepted bicyclists were asked to indicate their comfort level on the same six-point scale for either the
 8 overall facility on which they were intercepted, or, in a few cases where the facility had very distinct
 9 sections, for specific portions of that facility. Stated comfort levels on actual facilities provide a clearer
 10 view of how comfortable bicyclists actually are when riding on a given facility. Mean comfort scores
 11 from intercepted bicyclists are shown in Table 4, along with mean comfort scores on roughly equivalent
 12 examples from the hypothetical examples. In cases where the actual facility surveyed encompasses
 13 multiple hypothetical facilities, an average of the shaded scores shown in Table 3 is shown.

14 In most cases, the stated comfort in the intercepted facility is considerably lower than the comfort
 15 level on hypothetical routes with similar buffer treatments. There are several potential reasons for this
 16 discrepancy. First, respondents were asked about their comfort on the actual facility at the beginning of
 17 the survey, and asked about the hypothetical buffers later in the survey; they may have adjusted their
 18 rating scale as a result of earlier questions (although the survey did allow respondents to go back and
 19 change responses). Second, the actual facilities on the ground include features other than the buffer link
 20 sections, most obviously intersections that are usually more complicated and potentially less comfortable.
 21 Further, the actual roadway conditions, including speed and volume of motor vehicle traffic may differ
 22 from respondents' perceptions of the hypothetical facility. Finally, it's also possible that respondents
 23 overestimate their expected comfort on hypothetical facilities.

1 **TABLE 4 Intercepted Bicyclists' Stated Comfort and Change in Perceived Comfort on**
 2 **Intercept Facility**
 3

City	Facility and Segment	Type of Buffer Present						Stated Comfort	Hypo. Comfort *	n
		Solid painted buffer	Painted 2-3 foot buffer	Painted buffer and parked cars	Raised concrete curb	2-3 foot buffer and plastic flexposts	Planters separating the bikeway			
Austin	Barton Springs					●		4.2	5.1	18
	Rio Grande SB contraflow (two-way)					●		5.5	5.4	42
	Rio Grande NB with traffic (two-way)					●		5.3	5.4	
Chicago	Dearborn SB contraflow (two-way)			●		●		4.5	5.2	123
	Dearborn NB with traffic (two-way)			●		●		4.9	5.2	
	Milwaukee Striped painted buffer		●					3.8	4.7	220
	Milwaukee Buffer with Flexposts					●		4.7	5.4	
	Milwaukee Buffer with Parked Cars			●				5.0	5.1	
Portland	Multnomah	●		●		●	●	4.6	4.9	110
San Francisco	Oak Street		●			●		4.6	5.0	247
	Fell Street		●			●		4.5	5.0	247
Washington D.C.	L Street					●		4.5	5.4	300
All Facilities	Total	n/a						4.6	5.2	1060

4 *Hypothetical comfort scores are derived from the participants mean comfort scores on roughly equivalent
 5 hypothetical buffer scenarios presented in Table 3, as marked by the columns under "Type of Buffer Present."
 6

7 To get at the effect of the buffer specifically on the perceived changes for bicyclists, respondents were
 8 asked to indicate their level of agreement with a series of questions about the facility, from strongly
 9 disagree (1), somewhat disagree (2), somewhat agree (3), and strongly agree (4). Statements included "the
 10 buffer makes me feel safe" (with some facilities' buffers further broken down into separate statements for
 11 separate buffer sections), and questions about the effectiveness of the buffer at separating and protecting
 12 the bicyclist. Table 5 shows mean agreement and percentage of respondents indicating they agree

1 somewhat or strongly. While strong majorities indicate the buffer makes them feel safe, effectively
 2 separates bikes from cars, protects bikes from cars, and effectively separates bicyclists from pedestrians,
 3 there are a few outliers: The intercepted bicyclists in Washington D.C. were a little less likely to agree
 4 that the buffer effectively separated bikes from cars, though 81% did agree. The bicyclists in that city
 5 were also more likely in most cases to indicate that they “often” encounter parked cars, cars loading or
 6 unloading passengers, delivery vehicles, and taxis in the bike lane (four separate questions). On Barton
 7 Springs Road, one in three respondents disagreed that the buffer does a good job at protecting bikes from
 8 cars, though the sample size is too low to draw firm conclusions. On Dearborn Street, nearly half of the
 9 intercepted bicyclists felt that the facility did not effectively separate bicyclists from pedestrians.

10 **TABLE 5 Intercepted Bicyclists: Agreement on Buffer Effectiveness**

Questions and Category Response	Austin		Chicago				Portland		SF		DC	Total	
	Barton Springs	Rio Grande	Dearborn		Milwaukie		Multnomah		Oak	Fell	L Street		
			Section w/ Parked cars	Section w/ Flex-posts	Section w/ Parked cars	Section w/ Flex-posts	Section w/ Flex-posts	Section w/ Planters					
The buffer [section with] makes me feel safe.	n	16	41	116	117	218	216	107	108	241	241	293	1714
	% Agree*	100%	90%	97%	97%	94%	95%	88%	91%	95%	95%	89%	93%
The [buffer] effectively separates bikes from cars.	n	15	41	118		218		108		243	242	294	1279
	% Agree	100%	95%	94%		96%		96%		94%	93%	81%	92%
The [buffer] does a good job at protecting bikes from cars.	n	15	41	116		218		109		239	241	292	1271
	% Agree	67%	80%	96%		91%		92%		91%	87%	79%	87%
The [FACILITY] design effectively separates bicyclists from pedestrians	n	15	40	117		215		105		226	225	280	1223
	% Agree	87%	88%	55%		79%		81%		91%	92%	83%	83%

11 * The “% Agree” rows are the percentage of respondents indicating they “somewhat agree” or “strongly agree” with
 12 the statement.

13 Residents’ Perceptions of Actual Facilities

14 The perceptions of area residents to the impact of a new bicycle facility may play an important factor in
 15 the success of the facility in encouraging new ridership. Table 6 provides residents’ responses to survey
 16 questions pertaining to the impact of buffers. Around 71% of all residents indicated they agree somewhat
 17 or strongly that they would be more likely to ride a bicycle if motor vehicles and bicycles were physically
 18 separated by a barrier. Eight out of nine in the *Interested but Concerned* group agreed. Although around
 19 half of the resident respondents in the *Strong and Fearless* and *No Way No How* groups disagreed with
 20 this statement, that result is expected given that the former are likely comfortable enough to be riding
 21 already, and the latter are not going to be swayed no matter what. Similar numbers of both the overall
 22 resident sample and of the *Interested but Concerned* group felt that the new facility resulted in an increase
 23 in the safety of bicycling on that street, likely because they also agreed that the buffer did a good job of
 24 separating (85% agreement overall) and protecting (82% agreement overall) bikes from cars.

25 On the only facility that included planters separating the bike lane from standard traffic lanes,
 26 Portland residents had a higher amount of strong agreement with the effectiveness of the buffer, both in
 27 separating bikes from cars (57% strongly agreed in Portland compared to 46% overall) and in protecting
 28 bikes from cars (50% strongly agreed in Portland compared to 39% overall). This may suggest that the
 29 planter buffer is perceived as better at separating bikes from cars among residents in general (whereas
 30 intercepted bicyclists rated the buffer with planters about equally to the buffers with flexposts and with a
 31 concrete curb).
 32
 33

1 **TABLE 6 Resident Perceptions of Protected Bike Lanes and Buffers**

Question	Response Category	"Strong and Fearless"	"Enthusied and Confident"	"Interested But Concerned"	"No Way No How"	Total
I would be more likely to ride a bicycle if motor vehicles and bicycles were physically separated by a barrier.	n	86	474	837	430	1827
	% Disagree	49%	29%	12%	57%	29%
	% Somewhat Agree	23%	31%	27%	24%	27%
	% Strongly Agree	28%	40%	61%	19%	44%
Because of the protected bike lanes, the safety of BICYCLING on the street has . . .	n	98	520	812	482	1912
	% Decreased, Not Changed, or No Opinion	20%	14%	13%	43%	21%
	% Increased Somewhat	33%	26%	36%	38%	34%
	% Increased A Lot	47%	60%	52%	19%	46%
The buffer effectively separates bikes from cars.	n	96	503	802	465	1866
	% Disagree	14%	5%	12%	29%	14%
	% Somewhat Agree	38%	32%	41%	41%	38%
	% Strongly Agree	49%	63%	47%	30%	47%
The buffer does a good job at protecting bikes from cars.	n	93	496	787	450	1826
	% Disagree	17%	7%	15%	33%	17%
	% Somewhat Agree	40%	37%	48%	42%	43%
	% Strongly Agree	43%	56%	38%	24%	40%
The protected bike lanes effectively separate bicyclists from pedestrians.	n	98	517	813	480	1908
	% Disagree or no opinion	43%	23%	29%	51%	34%
	% Somewhat Agree	20%	36%	39%	33%	36%
	% Strongly Agree	37%	41%	32%	16%	31%

2

3 **CONCLUSIONS**

4 This study was limited in that the primary objective of the survey was not specifically to evaluate the
5 comfort of different types of buffers, but was to more broadly understand how well certain specific
6 protected bike lanes were functioning. Therefore, there was limited space to inquire about hypothetical
7 buffers, and a limited palate of actually implemented buffer types included. Future work should focus on
8 buffer types to allow for greater comparability of an array of different buffers, and to include other types
9 of questions such as a ranking of buffer types. A survey specifically designed to capture preferences could
10 use more robust survey designs.

11 The findings suggest that, in general, bike lanes with the addition of an extra buffered space can
12 increase the perceived safety and comfort of bicycling for both current and potential bicyclists, which in
13 turn would make people more likely to ride a bicycle for transportation. Overall, both current bicyclists
14 and residents (which includes both people who do and do not bicycle) indicated that they would feel
15 comfortable riding on a busy commercial street if there was a bike lane with physical protection. In
16 contrast, current bicyclists were also fairly comfortable on streets with standard striped bike lanes, while
17 residents were not.

18 Among current bicyclists, the presence of some type of vertical physical separation (compared to
19 hypothetical situations with buffers consisting only of paint) makes a positive difference in improving
20 sense of comfort, with a particularly large increase in stated comfort for the *Interested but Concerned*

1 group. However, the physical protection included in the buffer may achieve much of the beneficial effect
 2 using relatively affordable and available materials: the high stated comfort levels of bicyclists to 2-3'
 3 painted buffers with plastic flexposts suggests that simple delineators may be enough to substantially
 4 improve the comfort level of a buffer for many existing bicyclists. Because we did not ask the residents,
 5 which include people who currently do not bicycle, questions about the different buffer *types*, it is unclear
 6 whether the type of physical separation would have a major effect on attracting new bicyclists. Other
 7 issues related to maintenance and operations need to be considered in buffer selection, which this paper
 8 does not address.

9 Nearly all the intercepted bicyclists agree that the buffer makes them feel safer (compared to the
 10 previous facility). This is the case with painted buffers with plastic flexposts, as well as the lanes that had
 11 parked cars or planters in the buffers. With a few exceptions, bicyclists also overwhelmingly agree that
 12 the installed buffers are effective at separating cars from bicycles and protecting bicycles from cars.
 13 Stated comfort on recently ridden facilities suggests that the high expected levels of comfort based on
 14 hypothetical buffers are not quite achieved in reality – this may be due to lesser comfort at intersections,
 15 which is not taken into account in the hypothetical situations, or other factors.

16 Finally, residents expressed strong beliefs that the buffers effectively separate and protect bikes
 17 from cars, and as a result, the safety of bicycling on the routes has increased. Nearly three-quarters of all
 18 residents indicated that they would be more likely to ride a bicycle with physically separated bike lanes,
 19 with fully 88% of the *Interested but Concerned* group agreeing. Findings also suggest that Portland
 20 residents felt a stronger sense of separation and protection was achieved by the buffer with a planter over
 21 residents surveyed about facilities with buffers containing flexposts or parking strip.

22 23 **ACKNOWLEDGEMENTS**

24 This research was funded by the National Institute for Transportation and Communities (NITC), a
 25 U.S. Department of Transportation university transportation center, People for Bikes (formerly Bikes
 26 Belong) and the Summit Foundation. This research could not have been conducted without the significant
 27 participation of our city partners. These individuals provided data, design plans, conducted numerous
 28 reviews, and hosted our field visits: Mike Amsden (CDOT), David Smith (CDOT), Jim Sebastian
 29 (DDOT), Mike Goodno (DDOT), Roger Geller (PBOT), Rob Burchfield (PBOT), Ross Swanson
 30 (PBOT), Wendy Cawley (PBOT), Lindsay Walker (Lloyd District TMA), Seleta Reynolds (SFMTA),
 31 Miriam Sorell (SFMTA), Annick Beaudet (Austin), Nathan Wilkes (Austin), Aleksina Chapman
 32 (Austin). We acknowledge the efforts of the following Portland State University Students who assisted in
 33 survey mailing and video processing: Chase Ballew, Dan Stumpf, Dan Mercer, Lisa Okomoto, Allison
 34 Duncan, and Belinda Judelman. We also acknowledge the volunteers in each city that helped conduct the
 35 bicycle intercept survey. Joe Gilpin and Matt Berkow (Alta Planning + Design) and Jamie Parks provided
 36 input as project team members.

37 38 **REFERENCES**

- 39
40 1. Dill, J. and Voros, K., Factors Affecting Bicycling Demand: Initial Survey Findings from the
 41 Portland, Oregon, Region. In *Transportation Research Record: Journal of the Transportation*
 42 *Research Board, No. 2031*, Transportation Research Board of the National Academies,
 43 Washington, D.C., 2007, 9-17.
- 44 2. Winters, M., Davidson, G., Kao, D. and Teschke, K. Motivators and deterrents of bicycling:
 45 comparing influences on decisions to ride. *Transportation*. Vol. 38, No. 1, 2010, 1-16.
- 46 3. Dill, J. and N. McNeil. Four Types of Cyclists? Examination of Typology for Better
 47 Understanding of Bicycling Behavior and Potential. In *Transportation Research Record: Journal*
 48 *of the Transportation Research Board, No. 2387*, Transportation Research Board of the National
 49 Academies, Washington, D.C., 2013, 129-138.

- 1 4. Tilahun, N. Y., D.M. Levinson, K.J. Krizek. Trails, Lanes, or Traffic: Valuing Bicycle Facilities
2 with an Adaptive Stated Preference Survey, *Transportation Research Part A: Policy and*
3 *Practice*. Vol. 41, No. 4, 2007, 287–301.
- 4 5. Broach, J., J. Dill, and J. Gliebe, “Where Do Cyclists' Ride? A Route Choice Model Developed
5 with Revealed Preference GPS Data,” *Transportation Research-Part A*, 46: 1730–1740, 2012.
- 6 6. *Inventory of Protected Bike Lanes*. People for Bikes. Accessed online July 30 2014 at
7 <http://www.peopleforbikes.org/green-lane-project/pages/inventory-of-protected-bike-lanes>.
- 8 7. Urban Bikeway Design Guide. National Association of City Transportation Officials, New York.
9 <http://nacto.org/cities-for-cycling/design-guide/>. Accessed July 2014.
- 10 8. Torbic, D.J., K.M. Bauer, C.A. Fees, D.W. Harwood, R. Van Houten, J. LaPlante, and N.
11 Roseberry. *Recommended Bicycle Lane Widths for Various Roadways Characteristics*. National
12 Cooperative Highway Research Program Report 766, Transportation Research Board of the
13 National Academies, Washington, D.C., 2014.
- 14 9. Shafizadeh, K. and D. Niemeier. Bicycle Journey-to-Work: Travel Behavior Characteristics and
15 Spatial Analysis. In *Transportation Research Record: Journal of the Transportation Research*
16 *Board, No. 1578*, Transportation Research Board of the National Academies, Washington, D.C.,
17 1997, 84-90.
- 18 10. Rose, G. and H. Marfurt. Travel Behaviour Change Impacts of a Major Ride to Work Day Event.
19 *Transportation Research Part A: Policy and Practice*. Vol. 41, No. 4, 2007, pp. 351-364.
- 20 11. Emond, C. R., W. Tang, and S. L. Handy. Explaining Gender Difference in Bicycling Behavior.
21 In *Transportation Research Record: Journal of the Transportation Research Board, No. 2125*,
22 Transportation Research Board of the National Academies, Washington, D.C., 2009, 16–25.
- 23 12. Winters, M., and K. Teschke. Route Preferences Among Adults in the Near Market for Bicycling:
24 Findings of the Cycling in Cities Study. *American Journal of Health Promotion*, Vol. 25, No. 1,
25 2010, pp. 40–47.
- 26 13. Sanders, R. *Examining the Cycle: How Perceived and Actual Bicycling Risk Influence Cycling*
27 *Frequency, Roadway Design Preferences, and Support for Cycling Among Bay Area Residents*,
28 2013, University of California, Berkeley, Berkeley, CA, 218 pp.
- 29 14. Monsere, C., N. McNeil, and J. Dill. Multiuser Perspectives on Separated, On-Street Bicycle
30 Infrastructure. In *Transportation Research Record: Journal of the Transportation Research*
31 *Board, No. 2314*, Transportation Research Board of the National Academies, Washington, D.C.,
32 2012, 22-30.
- 33 15. Goodno, M., N. McNeil, J. Parks, and S. Dock. Evaluation of Innovative Bicycle Facilities in
34 Washington, D.C. In *Transportation Research Record: Journal of the Transportation Research*
35 *Board, No. 2387*, Transportation Research Board of the National Academies, Washington, D.C.,
36 2013, 139-148.
- 37 16. Stinson, M. and C. Bhat. Commuter Bicyclist Route Choice: Analysis using a Stated Preference
38 Survey. In *Transportation Research Record: Journal of the Transportation Research Board, No.*
39 *1828*, Transportation Research Board of the National Academies, Washington, D.C., 2003, 107-
40 115.
- 41 17. Hunt, J. D., and J. E. Abraham. Influences on Bicycle Use. *Transportation*, Vol. 34, No. 4, 2007,
42 pp. 453–470.
- 43 18. Akar, G., and K. J. Clifton. The Influence of Individual Perceptions and Bicycle Infrastructure on
44 the Decision to Bike. In *Transportation Research Record: Journal of the Transportation*
45 *Research Board, No. 2140*, Transportation Research Board of the National Academies,
46 Washington, D.C., 2009, 165–172.
- 47 19. Jackson, M. E., and E. O. Ruehr. Let the People Be Heard: San Diego County Bicycle Use and
48 Attitude Survey. In *Transportation Research Record: Journal of the Transportation Research*
49 *Board, No. 1636*, Transportation Research Board of the National Academies, Washington, D.C.,
50 1998, 8–12.

- 1 20. Garrard, J., G. Rose, and S. Lo. Promoting Transportation Cycling for Women: The Role of
2 Bicycle Infrastructure. *Preventive Medicine*, Vol. 46, No. 1, 2008, pp. 55–59.
- 3 21. Krizek, K. J., P. J. Johnson, and N. Tilahun. Conference Proceedings 35: Gender Differences in
4 Bicycling Behavior and Facility Preferences. Transportation Research Board of the National
5 Academies, Washington, D.C., 2005, pp. 31–40.
- 6 22. Monsere, C., J. Dill, N. McNeil, K. Clifton, N. Foster, and T. Goddard. *Lessons from the Green*
7 *Lanes: Evaluating Protected Bike Lanes in the U.S.* National Institute for Transportation and
8 Communities, Portland, OR, 2014.
- 9 23. Anderson, M. “Wonktastic Chart Rates 15 Different Ways To Protect Bike Lanes” Available at
10 [http://www.peopleforbikes.org/blog/entry/wonktastic-chart-rates-15-different-ways-to-protect-](http://www.peopleforbikes.org/blog/entry/wonktastic-chart-rates-15-different-ways-to-protect-bike-lanes)
11 [bike-lanes](http://www.peopleforbikes.org/blog/entry/wonktastic-chart-rates-15-different-ways-to-protect-bike-lanes). Accessed July 31, 2014.
- 12 24. Geller, R. *Four Types of Cyclists*. Portland Bureau of Transportation, Portland, Ore., 2006.
13 Available at <http://www.portlandoregon.gov/transportation/article/264746>. Accessed April 18,
14 2014.